



REFERENCE	CAPACITY	TYPE	MODEL	INSTALLATION
tbd	750L	PRESSURIZED	HEAT PUMP BOILER	FLOOR STANDING


version.0

constructive specifications

capacity	750L
tank material	stainless steel AISI 316L (EN 1.4404)
thermal insulation	100mm thermal insulation made from flexible polyurethane
casing	"Skay" (PVC) outer casing with zip clothing
temperature gauge	0 - 120°C
coils material and connections	RVS / stainless steel AISI 316L
coil surface area	6,00m²
coil kW rating output 85/60°C	118kW
max. operating pressure	8bar (0,8MPa)
test pressure	12bar (1,2MPa)
maximum working temperature	90°C
heating element (optional)	immersion connection 1½"
weight (empty / full)	240kg / 1040kg
heat losses	120W (EN 12897)
ErP class	C

connections and dimensions

connections

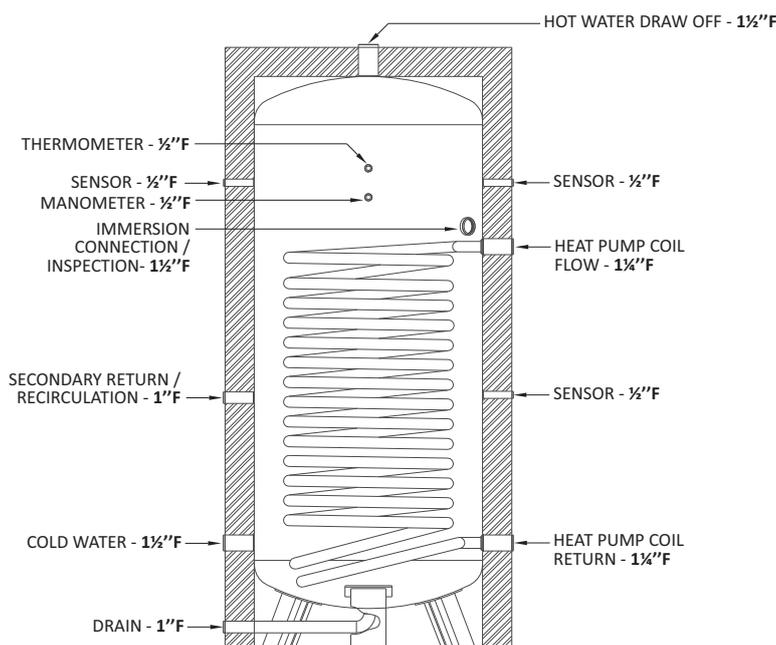

dimensions

